
LARGE FORMAT PRINTER SURECOLOR™ SC-F6330/F7270





Sleeker, faster, higher performance. Epson SureColor F-Series printers include some of the latest advancements in printing technology to deliver amazing performance at an affordable running costs. With a fresh, stylish look in black, the SC-F6330 turns any office into a modern space. The SC-F7270 is designed for roll-based production, ideal for short to medium-volume roll-to-roll custom fabric, textile and soft signage. Developed with printing technology synonymous with Epson, both the SC-F6330 and SC-F7270 uses PrecisionCore™ TFP® printhead and UltraChrome DS ink in bigger ink pack capacities for increased productivity and higher quality printing of custom clothing, soft signage, merchandise and hard surface work.

1.5 L

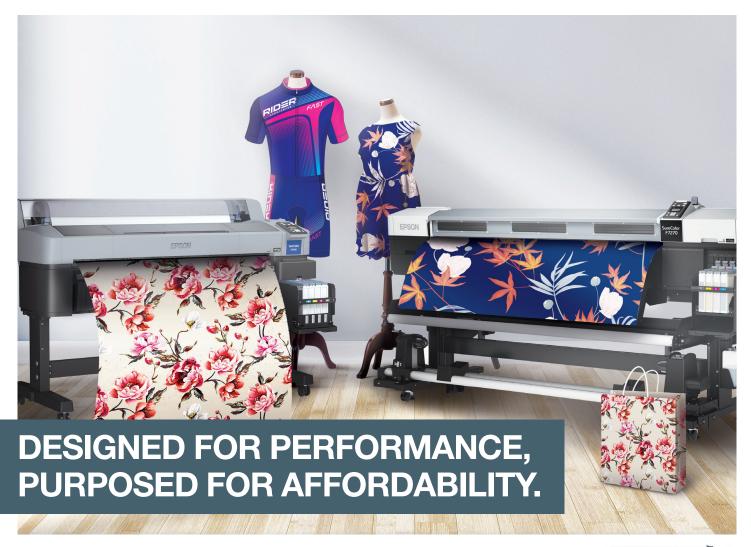

64" Wide







1 Year Warranty

Environmentally

RIP SC-F6330

DYE SUB INK





SC-F6330 High capacity 1.1L ink packs



SC-F7270 High capacity 1L ink packs



64" Wide Roll-to-Roll Dye-Sub



IT'S IN THE DETAILS.

With Epson UltraChrome™ ink, the SureColor SC-F6330/SC-F7270 delivers consistent, vibrant prints.

Remarkable Productivity

SC-F7270

Deliver superior print quality, speed and reliability during continuous operation, with minimal downtime through Epson's advanced PrecisionCore printhead.

Affordable Prints with Peace of Mind

8,3

PRODUCTION HIGH QUALITY

Cost-effective 1.1L/1L*** ink packs and new high-density black ink ensure lower ink usage and overall printing costs.

Consistent Vibrant Quality

UltraChrome DS ink is specially formulated to produce vibrant colours, intense blacks, sharp contours and smooth gradations.





Epson Edge Print

INCLUDED

MAX SPEED

^{*}Up to 64" wide for F7270, 44" for SC-F6330

^{**}All speed is dependent on RIP used

^{**1}L ink packs are for use with SC-F7270 and 1.1L ink packs are for use with SC-F6330



Model Numbe	er		SC-F6330	SC-F7270	
Printer Width			44"	64"	
Printing Tech			··	- ·	
Print Method	31		PrecisionCore™ TFP® Printhead		
Nozzle Configu	uration		360 nozzles x 4 channels x 1 head	360 x 2 nozzles each colour (x4)	
Maximum Resolution			720 x 1440 dpi		
Print Modes	Resolution	Pass	Print Speed (m²/h)		
Draft	360 x 720	1	63.4	58.9	
High Speed	720 x 720	2	30.4	30.3	
Production	720 x 720	3	22.7	22.2	
Production	720 x 720	4	15.8	16.2	
High Quality	720 x 720	6	11.2	11.1	
High Quality	720 x 1440	8	8.3	8.2	
Ink System	720 X 1440		0.0		
Ink Type			Epson UltraChrome™DS dye-sublimation ink		
Colours				Plack	
			4 colours - Cyan, Magenta, Yellow, High-Density Black		
Ink Tank Capacity			1.5L	41	
Ink Pack Capacity			1.1L	1L	
Paper Handlii	_				
Paper Feed Method			Rear roll feed (2" / 3" core with max 150mm	Rear roll feed (2" / 3" core with max 250mm	
			diameter); Auto take-up reel support over	diameter); Auto take-up reel unit	
			914.4 mm (36")		
Media Width			300.0 mm (11.8") to 1117.6 mm (44")	300 to 1625.6mm	
Printing Width (Margin)			Max. 1112mm	Max. 1615.6mm	
			Side Margin: 3mm both sides	Side Margin: 5mm both sides	
				(10mm when using Media Holding Plates)	
Media Thickness			Up to 1mm	0.08 - 1mm	
			(over 75gsm)	(over 75gsm)	
Heat Press C	ondition				
Transfer Condi	ition		Heater		
Temperature			200°C		
Time			40 sec		
Control Panel	ı				
Colour & Size			2.7 inch colour LCD	2.5 inch colour LCD	
Connectivity			El morroscon 200		
Standard			Hi-Speed USB, 100BASE-TX /1000BASE-T		
Ethernet			10BASE-T / 100BASE-TX / 1000BASE-T		
Memory			10BAGE-17 100BAGE-1X7 1000BAGE-1		
			512MB		
Main					
Network			128MB	Descrite Descrite Control Control	
Printer Softw	are			P Remote Panel 2, EpsonNet Setup, EpsonNet Config,	
			EpsonNet Pvrint, Wasatch SoftRIP		
Electrical Spe	ecifications				
Rated Voltage			AC 100 – 240V		
Rated Frequency			50 – 60Hz		
Power Supply			1.0 - 0.5A	10 - 5A	
Power Consumption					
Operating			Approx. 65W	Approx. 460W	
Standby	Standby		Approx. 20W	Approx. 30W w/ heater OFF	
Sleep			Approx. 3W	Approx. 10W	
Power Off	<u>f</u>		Less than 0.4W	Less than 0.6W	
Recommende	ed Operating				
Temperature	-		15 - 35°C; 20 - 80% RH (non-condensation)		
Bundled Item					
Ink Supply System			C12C932491	-	
and Waste Ink Bottle Kit			··		
Substrate Support System				 C12C932471	
				3120002771	
and Ink Supply System			C12C024741	C10C022111	
Initial Ink Pack Set			C12C934741	C12C932111	
Auto Take Up Reel			C12C934671	<u> </u>	
Roll Adaptor			C12C934701		
Optional			Order Code	Order Code	
Auto Cutter Bla	ade		C13S902006	<u> </u>	
Media Holding Plate			-	C12C932121	
Media Ho l ding				0100010000	
Media Holding Maintenance K			C13S210042	C13S210038	
_	Cit		C13S210042 C13T724000	C135210038 C13T724000	

Dimensions & Weight SC-F6330 Weight: 94kg (without ink)



Ink Pack Compatibility 1.1L Ink Packs

High Density Black
 Cyan
 Magenta
 Yellow
 C13T46H200
 C13T46H300
 C13T46H400

SC-F7270 Weight: 274kg (without ink)



Ink Pack Compatibility 1L Ink Packs

High Density Black
 Cyan
 Magenta
 Yellow
 C13T741200
 C13T741200
 C13T741300
 C13T741400



©2019 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective

Epson disclaims any and all rights in those marks. Print samples shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing Printed September 2019